


TBP 120

Industrial Grade Duct Tape

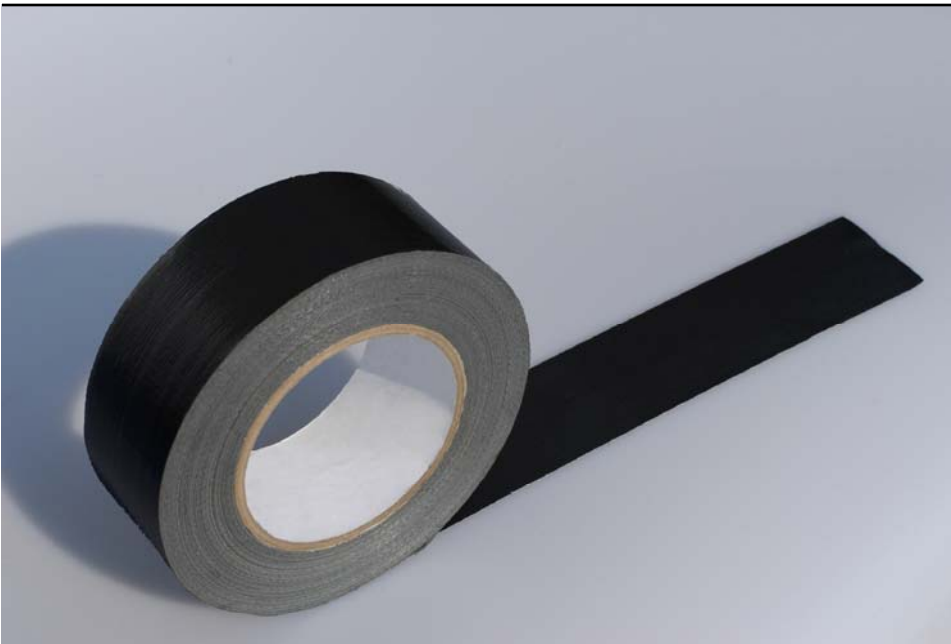

Features & Benefits:

- Waterproof Backing
- Variety of Colors
- Competitive pricing
- Conforms to a wide variety of surfaces
- Indoor and Outdoor use
- Aggressive Adhesive
- Easy Unwind
- Excellent high tack

Applications:

- Heating, Air Conditioning, ventilating, and refrigeration applications
- Metal and flexible ducts
- Packaging and boxing
- Seat repair
- Book binding
- General holding and bundling

Preparation & Use:

The surface to which the tape is to be applied to should be clean, free of dust, grease, oil and be dry.

Recommended storage conditions: 40-60% Humidity, 60°F-80°F.

Tape should be stored in a cool, dry area at temperatures of 60°F to 80°F.

Description:

TBP 120 Industrial Grade Duct Tape is a single-coated construction on polyethylene coated cloth. With an adhesive rubber the TBP 120 Duct Tape is available in Silver, Black, Tan, Brown, Red, Olive Drab, White, Blue, Light Green, Green, Orange, Yellow and Burgundy.

Technical Data	Typical Value
Total Thickness	10 mils +/- 1 (PTSC-33)
Adhesive	Natural Rubber
Backing	Polyethylene Coated Cloth
Tensile Strength	27 lb/in +/- 1 (PSTC-33)
Adhesion to Steel	60 oz. / Inch +/- 4 (PSTC-1)
Maximum Performance Temp	200 F
Elongation	15% +/- 1.5 (PTSC-31)

All information and recommendations given by us in good faith are on the basis of practical experience but without warranty. It's essential that the user evaluate the product for a period of time to determine whether it fits a particular purpose and is suitable for the user's method of application. Pressure-sensitive adhesive tapes function as a mechanical product. The adhesive however is a chemical composition that can be sensitive depending on the environment it is in. One who purchases a pressure-sensitive adhesive product should be aware of the shelf life and not to purchase the product on after the expiration date. Optimum storage temperature is 70 F with a storage range of 60 F to 80 F. Cool dry storage is recommended.

