


TBP 785 Drywall Release 14 Day Painters Tape

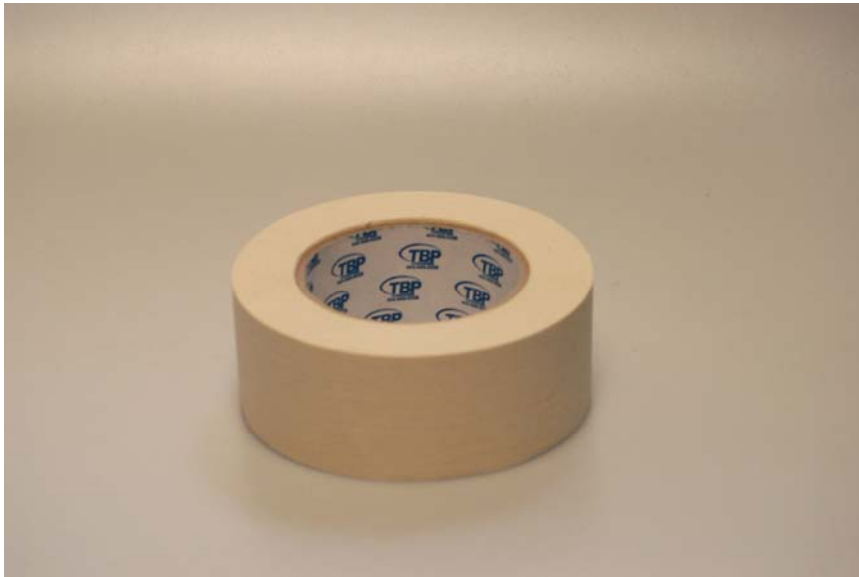

Technical Data:	
Backing:	Fine Structured Crepe Paper
Adhesive:	Synthetic Rubber
Adhesion:	26 oz/inch
Elongation:	11.5%
Maximum Temp:	150° F

Surface Preparation:

The surface to which the tape is to be applied to should be clean, free of dust, grease, oil and be dry.

Pressure-sensitive adhesive tapes function as a mechanical product. The adhesive however is a chemical composition that can be sensitive depending on the environment it is in. One who purchases a pressure-sensitive adhesive product should be aware of the shelf life and not to purchase the product on after the expiration date. Optimum storage temperature is 70 F with a storage range of 60 F to 80 F. Cool dry storage is recommended. All information and recommendations given by us in good faith are on the basis of practical experience but without warranty. It's essential that the user evaluate the product for a period of time to determine whether it fits a particular purpose and is suitable for the user's method of application.

Description:

TBP 785 Contractors Premium Painters Tape is specifically formulated for exposure to sunlight for up to 14 days, exhibiting easy clean removal from most surfaces. Compatible for use on new, unpainted or freshly painted wallboard

Features & Benefits:

- UV Resistant for up to 14 days
- Clean and Easy Removal
- Excellent Moisture resistance
- Superior longevity
- Resistant against humidity
- Stain resistant
- Superior Paint lines

Applications:

- Exposed Masking to weather / outdoor conditions
- Interior Masking of Windows
- Use on lacquer or PE coated surfaces
- Unfinished wood, wallpaper
- New or unpainted or freshly painted wallboard